


BRT-AM-28

FEATURES

BRT-AM-28 PCB Anti-Metal Tag is designed specifically for complex metal environments. It has the advantages of large reading distance, high sensitivity and easy to install. It is especially suitable for a variety of metal environments, easy to use in metal asset equipment management, gun control, medical equipment management, logistics and etc.

HOUSING CONFIGURATION

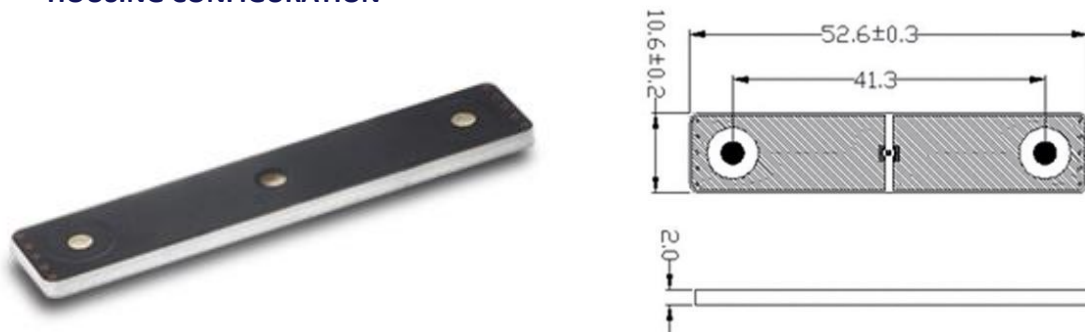

PRODUCTS

Part No.	Weight	Dimensions (LxWx H)	Chip	Installation	Color
BRT-AM-28	6g	53mm x 11 mm x 2 mm	Impinj Monza R6	3M Glue	Black

SPECIFICATIONS

PARAMETER	SPECIFICATION
Frequency bands, MHz	902-928
Sensitivity	-15dB(reference distance 6m)
Chip	Impinj Monza R6
Protocol supported	ISO 18000-6C, EPC global C1Gen2
Function	Read/Write
EPC	96-EPC
Chip memory	-
TID	96bits
Access password	-
Kill password	-
Data retention	10 years
Write endurance	10,000 cycles
Installation method	3M Glue
Protection class	IP65
Operating Temperature	-20° C to +85° C
Material of shell	PCB,3M Glue

MyAntenna RF Technology Co., Ltd

ADD: No.RM 405, R3-A Building, Shenzhen High-Tech Park, Nanshan, Shenzhen, P.R. China.

TEL: +86-0755-86503881 FAX: +86-0755-27801677 E-mail: nfc@myantenna.com