


BRT-UAM-02

FEATURES

BRT-UAM-02 vehicle anti-disassemble tag is designed specifically for the vehicle identification, with large reading distance, high sensitivity, excellent physical characteristics. Easy to use in vehicle management etc.

HOUSING CONFIGURATION

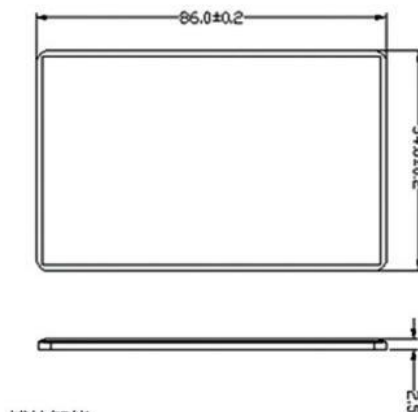

Part No.	Weight	Dimensions (LxWx H)	Chip	Installation	Color
BRT-02H3	5g	86 x 54 x 2.5mm	Alien H3	3M Glue	White
BRT-02R6	5g	86 x 54 x 2.5mm	Impinj R6-P	3M Glue	White

SPECIFICATIONS

PARAMETER	SPECIFICATION	
Frequency bands, MHz	860-960	
Sensitivity	-17dB(reading range reach over 10m)	-19dB(reading range reach over 10m)
Chip	Alien H3	Impinj R6-P
Protocol supported	ISO 18000-6C, EPC global C1Gen2	
Function	Read/Write	
EPC	96-EPC	96-EPC
Chip memory	512 User Bits	32 User Bits
TID	64 bits	48 bits+32 bits=96bits
Access password	32bits	32bits
Kill password	32bits	32bits
Data retention	10 years	10 years
Write endurance	10,000 cycles	10,000 cycles
Installation method	3M Glue	
Protection class	IP67	
Operating Temperature	-40° C to +85° C	
Material of shell	Ceramic,Silver, 3M glue, PC plastic	

MyAntenna RF Technology Co., Ltd

ADD: No.RM 405, R3-A Building, Shenzhen High-Tech Park, Nanshan, Shenzhen, P.R. China.

TEL: +86-0755-86503881 FAX: +86-0755-27801677 E-mail: nfc@myantenna.com