

3dBi 868MHz Fiberglass Antenna

FEATURES



The 3dBi Glass Fiber Antenna is an Omni 360-degree signal transmission and reception antenna, N-type male connector, 23.5x550mm lightweight antenna for indoor-outdoor 868MHz applications.

PRODUCTS

Part No.	Weight	Dimensions (L x W x H)	Connector	Color
M02-0400310R0A		Φ23.5*550mm	N Type Male	White

SPECIFICATIONS



PARAMETER	SPECIFICATION
Frequency Bands, MHz	860-870
VSWR (Max)	3.0:1
Peak Gain, dBi (Typ)	Up to 3.57
Nominal Impedance	50 Ω
Max Power (ambient temp of 25°C)	10 Watts
Azimuth Beam Width (deg)	Omnidirectional
Polarization	Linear, Omnidirectional
Radome	Fiberglass pipe, White
Storage Temperature Range (°C)	-40° C to +85° C
Operational Temperature Range (°C)	-30° C to +80° C
Material Substance Compliance	REACH/RoHS Compliant
HSCODE	8517707090
USHSCODE	8517620010
UPC	

MyAntenna RF Technology Co., Ltd


ADD: No.RM 405, R3-A Building, Shenzhen High-Tech Park, Nanshan, Shenzhen, P.R. China.

TEL: +86-0755-86503881 FAX: +86-0755-27801677 E-mail: nfc@myantenna.com

ELECTRICAL DATA

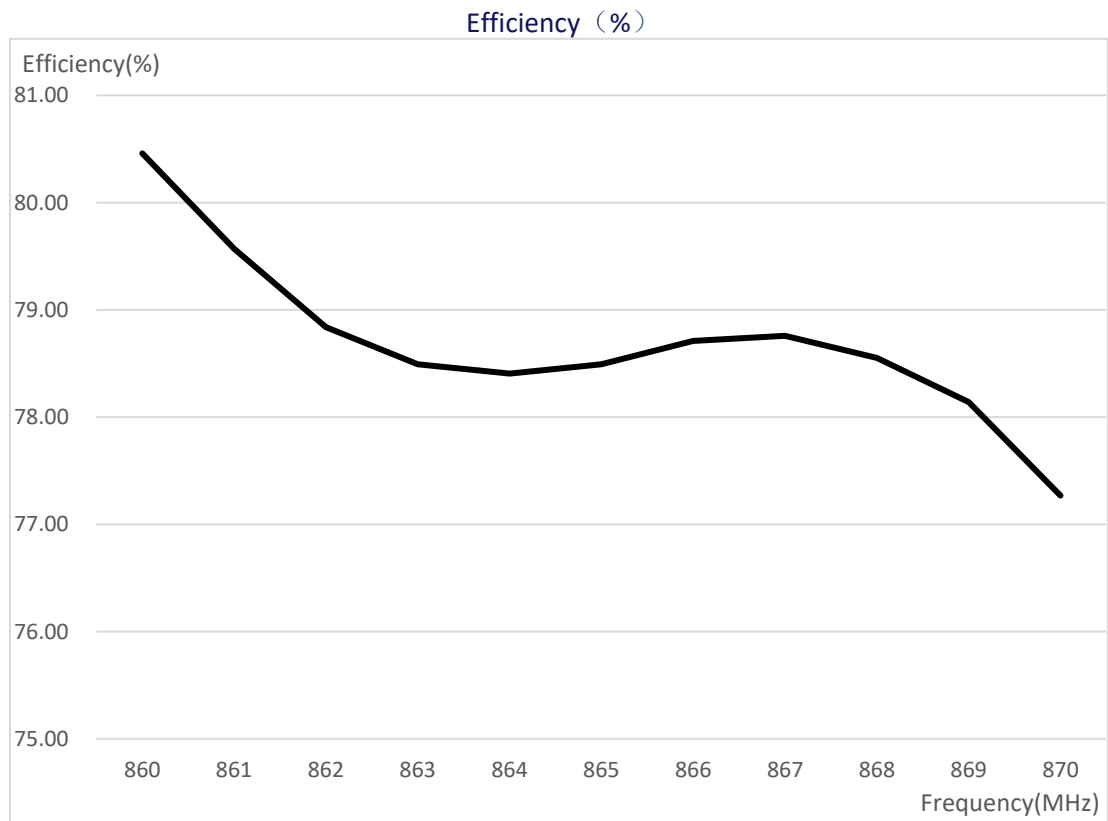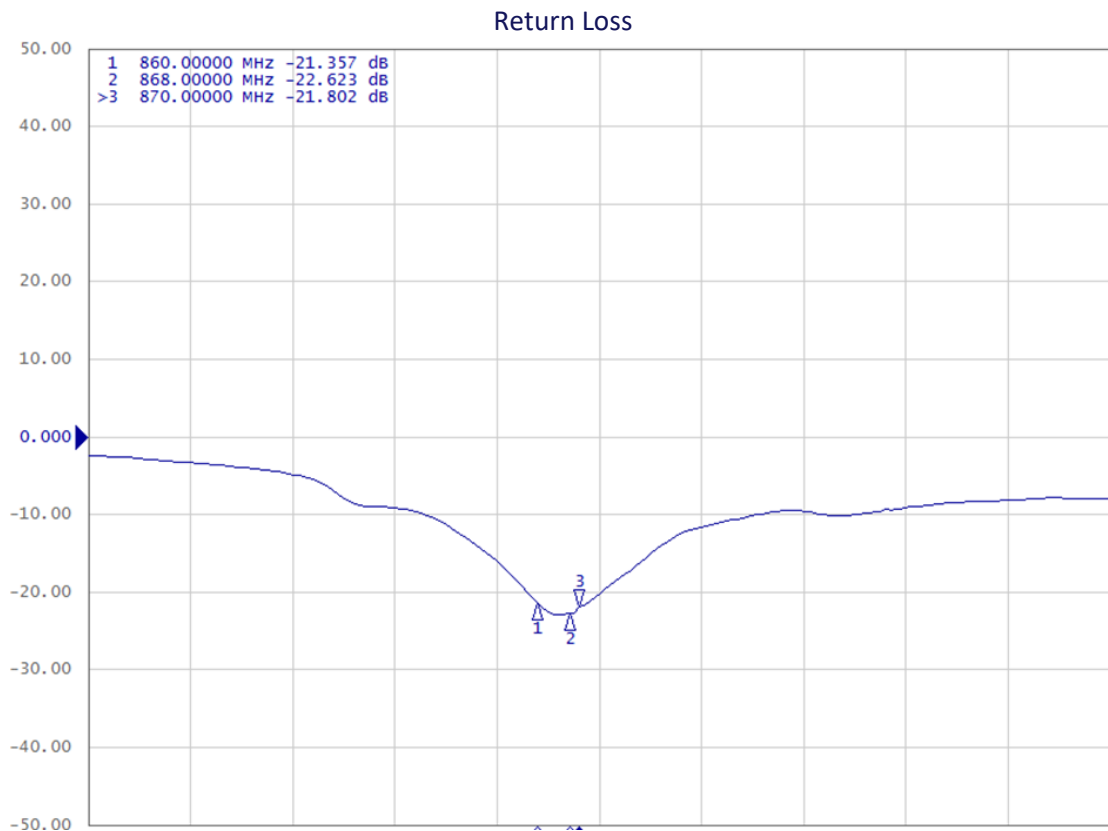


Peak Gain (dBi)

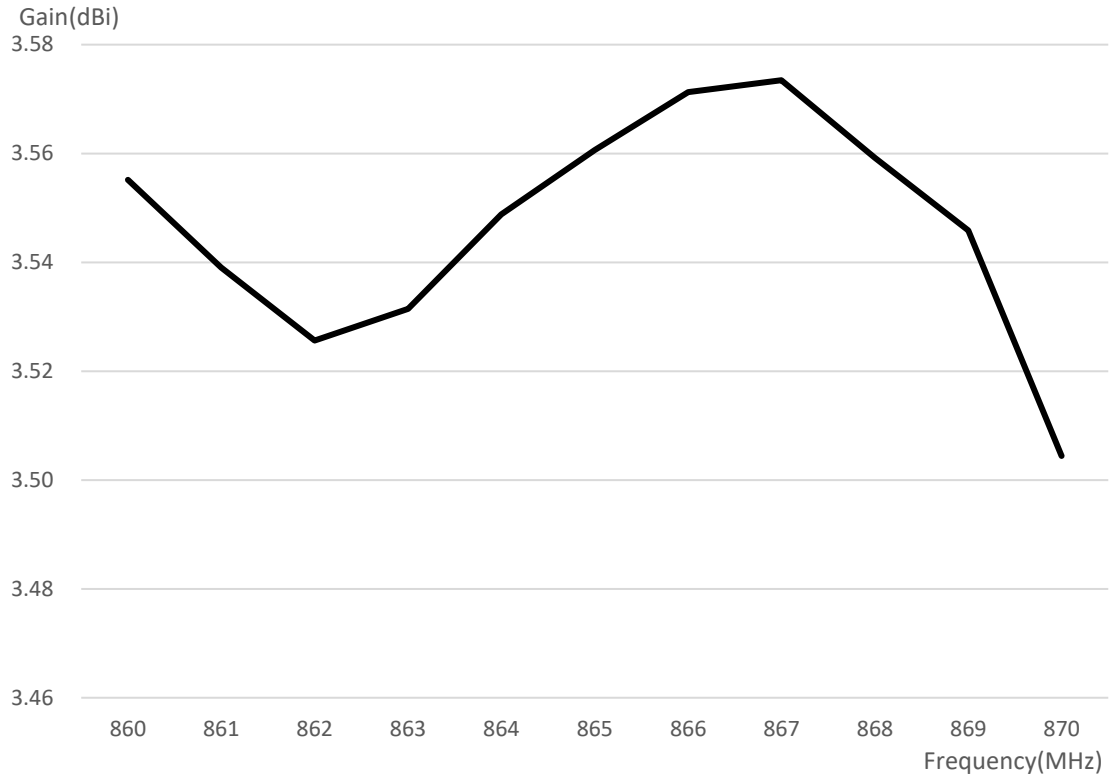


RADIATION PATTERNS


2D Radiation Pattern at 860MHz

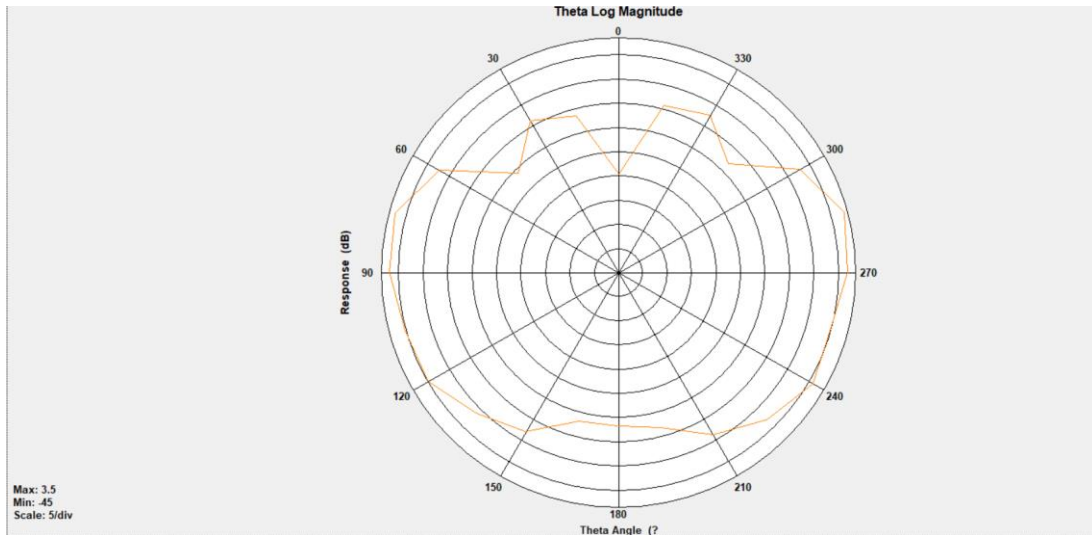

2D Radiation Pattern at 865MHz

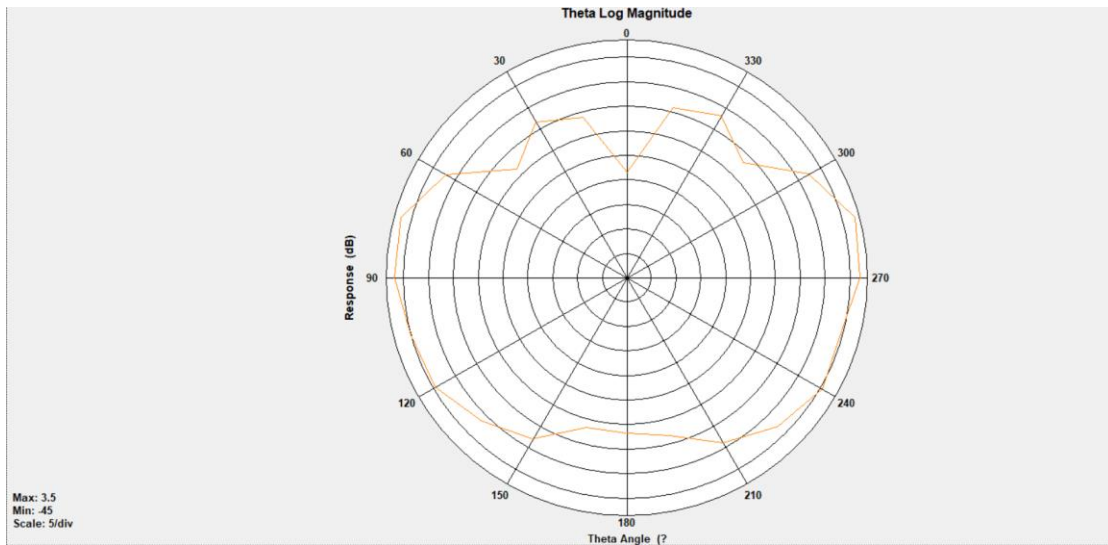

2D Radiation Pattern at 870MHz

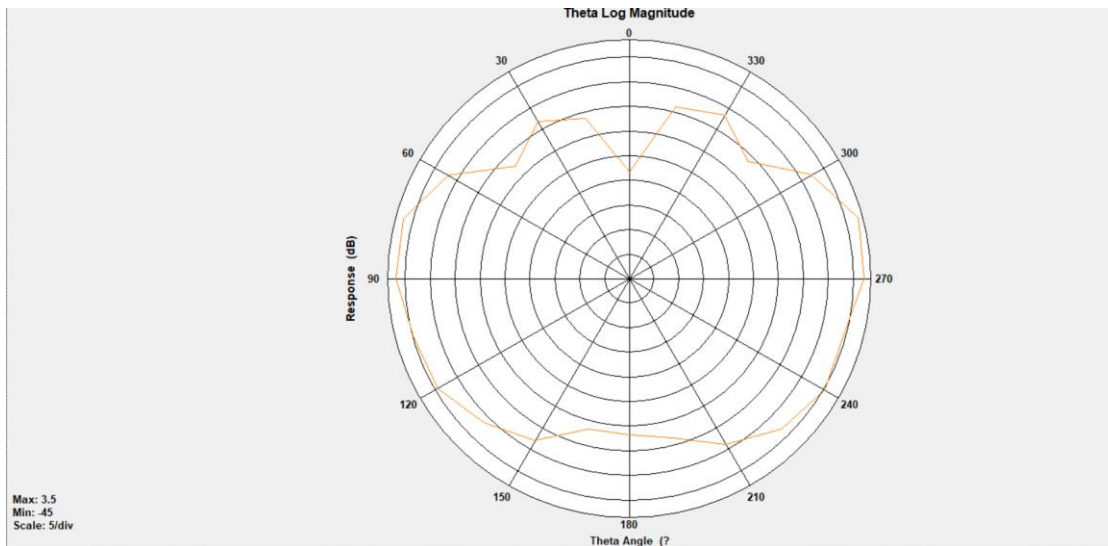




HOUSING CONFIGURATIONS

MyAntenna RF Technology Co., Ltd

ADD: No.RM 405, R3-A Building, Shenzhen High-Tech Park, Nanshan, Shenzhen, P.R. China.

TEL: +86-0755-86503881 FAX: +86-0755-27801677 E-mail: nfc@myantenna.com

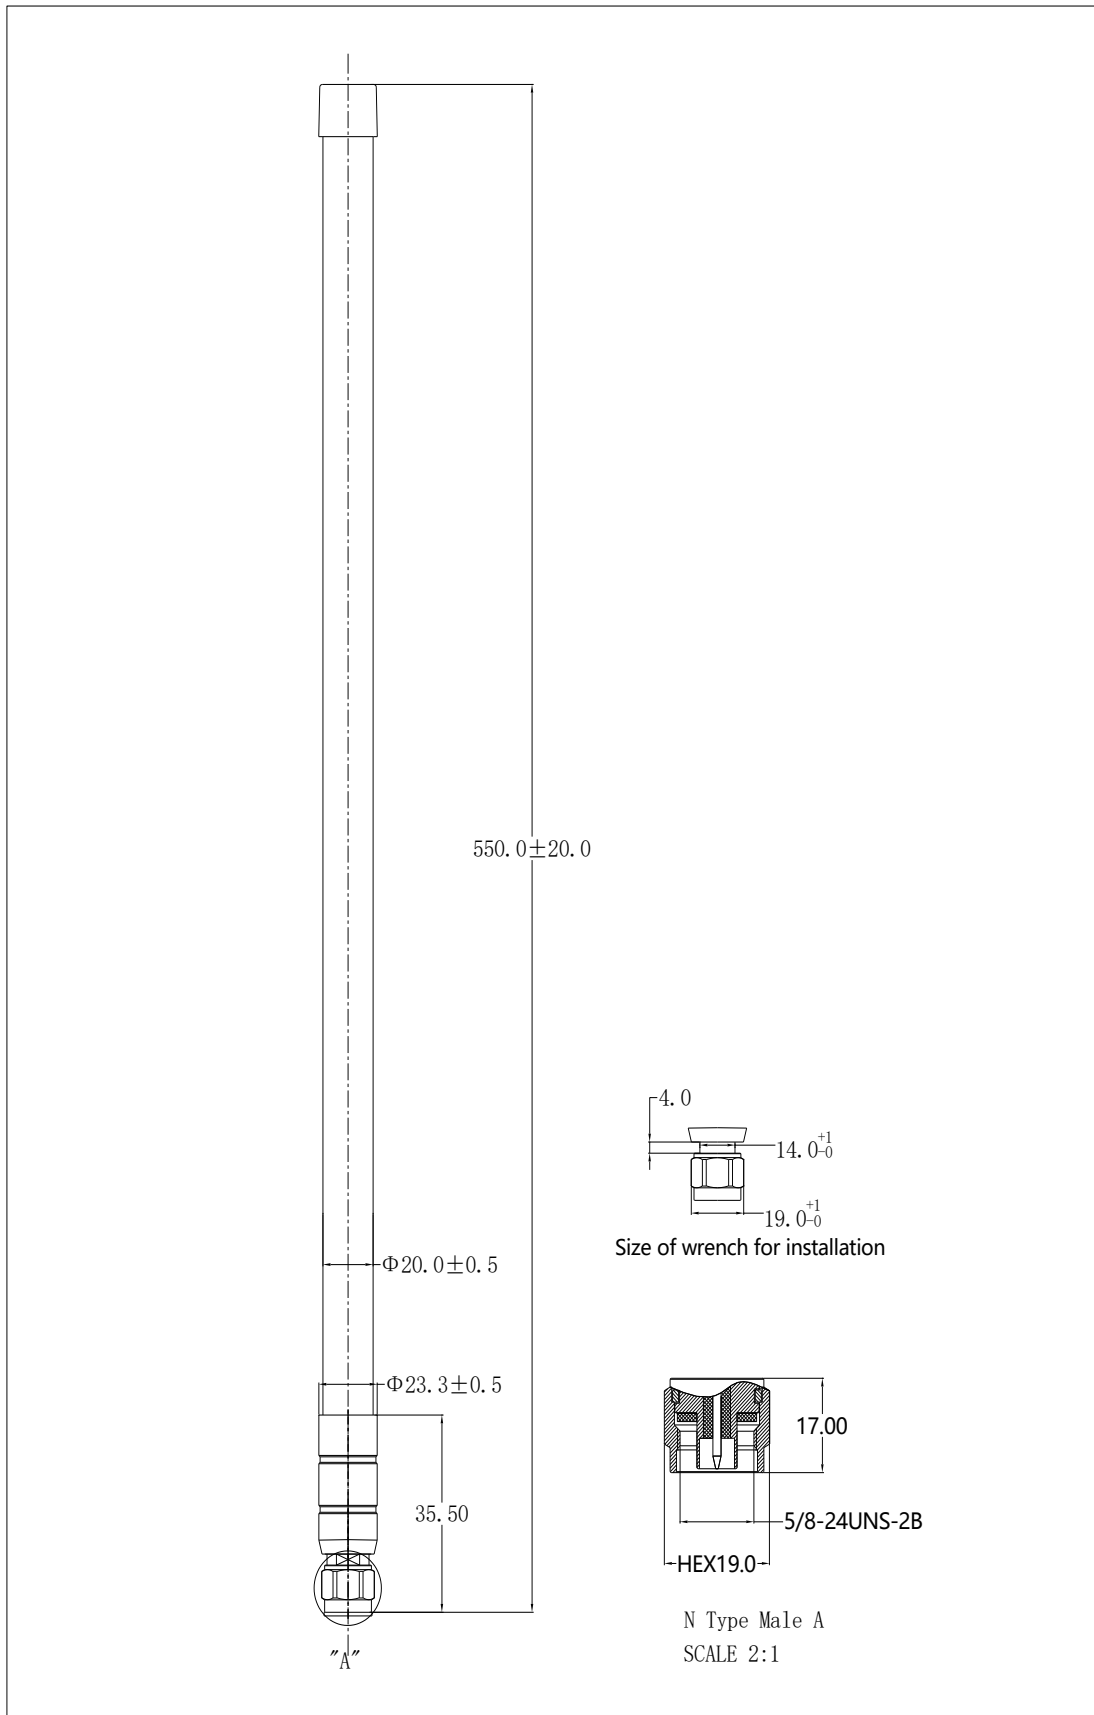

Fiberglass Antenna Mounting Methods 1

MyAntenna RF Technology Co., Ltd

ADD: No.RM 405, R3-A Building, Shenzhen High-Tech Park, Nanshan, Shenzhen, P.R. China.

TEL: +86-0755-86503881 FAX: +86-0755-27801677 E-mail: nfc@myantenna.com



Fiberglass Antenna Mounting Methods 2

MyAntenna RF Technology Co., Ltd

ADD: No.RM 405, R3-A Building, Shenzhen High-Tech Park, Nanshan, Shenzhen, P.R. China.

TEL: +86-0755-86503881 FAX: +86-0755-27801677 E-mail: nfc@myantenna.com

