

BRA-01DL

9dBi Double Feeding Cross -Polarization UHF Antenna

FEATURES

- Designed for both Indoor & Outdoor applications, IP67
- Low profile patch Antenna
- Extremely low VSWR and axial ratio
- Weather and UV resistant radome
- Wide range of connector and cable options
- Radome is white high strength ASA
- 9 dBi Peak Gain, Cross -Polarization



PRODUCTS

Part No.	Weight	Dimensions (LxWx H)	Connector	Color
BRA-01DL	0.91kg	258 x 258 x 36mm	N-Female	White
BRA-01DL-KFD	0.91kg	258 x 258 x 36mm	N-KFD	White

SPECIFICATIONS

PARAMETER	SPECIFICATION
Frequency Bands, MHz	902-928
VSWR (Max)	1.3 : 1
Peak Gain, dBi(Typ)	Up to 9.0
Nominal Impedance	50 Ω
Max Power (ambient temp of 25°C)	10 Watts
Azimuth Beam Width (deg)	70° x 70°
Polarization	Linear
Front to Back Ratio	20 dB
Axial Ratio	1 dB Typical
Mounting	2 or 4 Threaded Studs
Lightning Protection	DC Grounded
Environmental Sealing	IP 67
Radome	White High Strength ASA
Storage Temperature Range (°C)	-40°C~+ 85°C
Operational Temperature Range (°C)	-40°C~+ 85°C
Material Substance Compliance	REACH/RoHS Compliant
HSCODE	8517707090
USHSCODE	8517620010


MyAntenna RF Technology Co., Ltd

ADD: No.RM 405, R3-A Building, Shenzhen High-Tech Park, Nanshan, Shenzhen, P.R. China.


TEL: +86-0755-86503881 FAX: +86-0755-27801677 E-mail: nfc@myantenna.com

RADIATION PATTERNS

2D Radiation Pattern at 902MHz

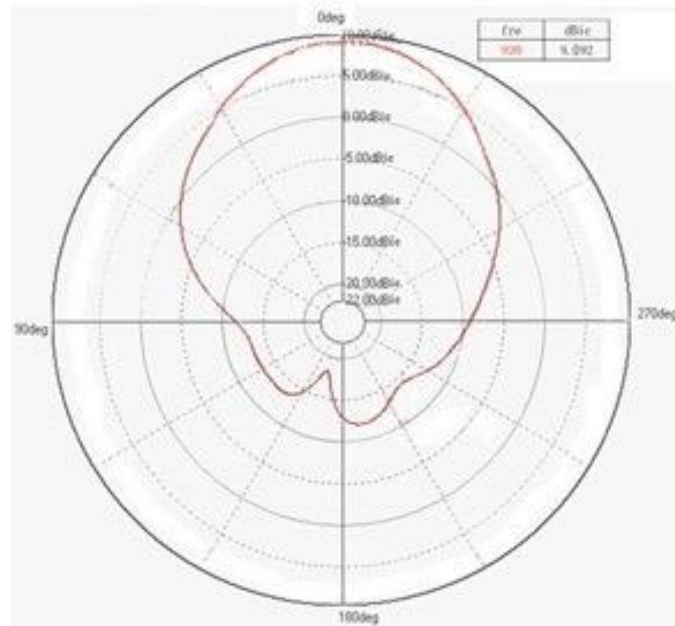

3D Radiation Pattern at 902MHz

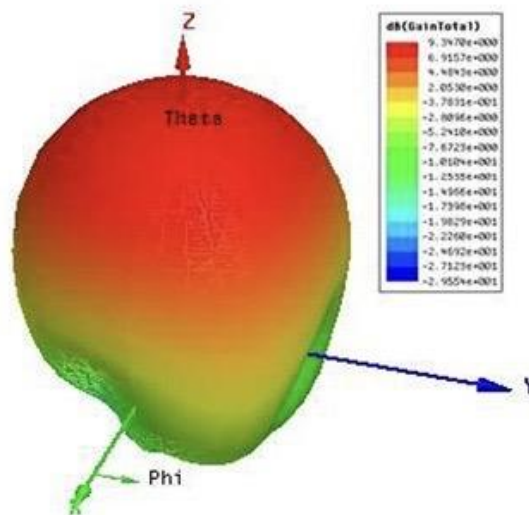

HOUSING CONFIGURATIONS

